

Foot Valve (SFVM)

SFVM220~230 Series



SFVM 230

SV1000

SV3000

SV5000

SV6000

SV231
~232

COIL
CONNECTOR

SMV100

SMV200

SMVS200

SMVF231
~232

SMVF250


SMVF350

SFVM

SHV


CAUTION

How to order

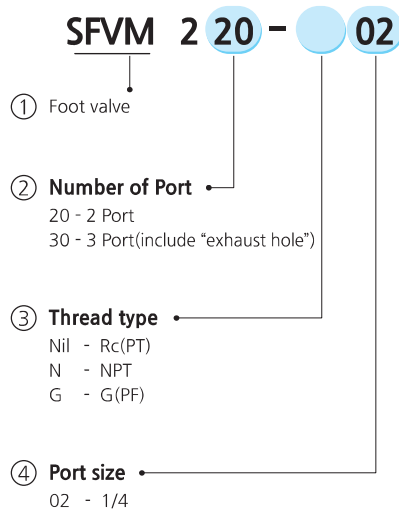


Symbol



2 Port



3 Port



Dimensions (mm)

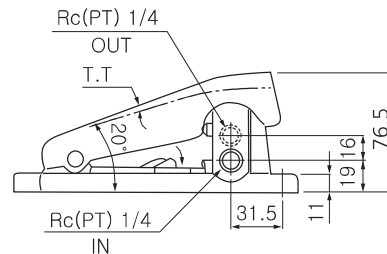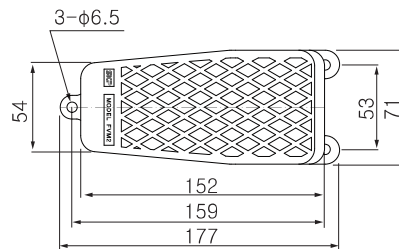

Specification

Fluid	Compressed Air
Max. operating pressure	0~10bar (0~1MPa)
Ambient and Media temp.	-5~60℃ (No freezing)
Effective orifice(Cv)	19mm ² (1.0)
Lubrication	Not required
Port size	1/4


Pilot type Foot Valve (SFVM)

SFVM250 Series




SFVM 250


How to order

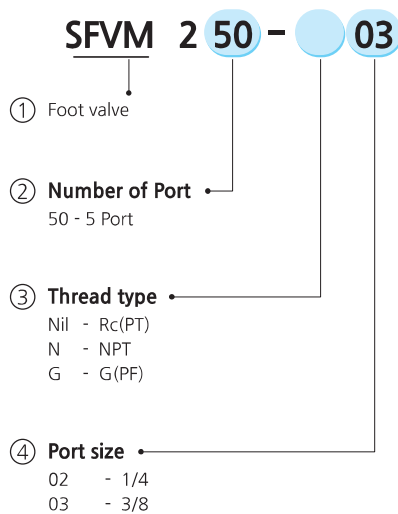

Symbol



Dimensions (mm)

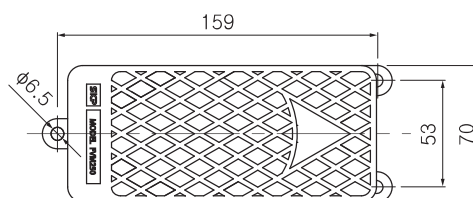

Specification

Model	SFVM250-02	SFVM250-03
Fluid	Compressed Air	
Max. operating pressure	0~10bar (0~1MPa)	
Ambient and Media temp.	-5 ~ 60℃ (No freezing)	
Effective orifice(Cv)	19mm ² (1.0)	45mm ² (2.4)
Lubrication	Not required	
Port size	1/4	3/8

