


중형실린더 ISM 시리즈 MID CYLINDER ISM SERIES

일반형(B, LB) General Type(B, LB)

기본형(B) Basic Type(B) ■ Oilless Type ISM -B, Low Hydraulic Type ISM L-B

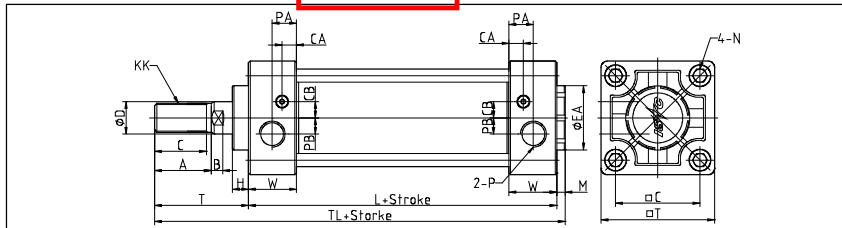


단위: mm

I-D(mm)	Stroke Range	C	A	B	ØC	ØT	ØD	ØEA	H	KK	L	N	P(PT)	PA	PB
40	~500	27	30	8	44	61	16	31.5	10	M14XP1.5	84	M8XP1.25	1/4	11	7
50	~600	32	35	10	52	70	20	39.5	10	M18XP1.5	90	M8XP1.25	3/8	12	8
63	~600	32	35	10	64	83	20	39.5	10	M18XP1.5	98	M8XP1.25	3/8	13	11.5
80	~800	37	40	12	78	102	25	51.5	14	M22XP1.5	116	M12XP1.75	1/2	16	12
100	~800	37	40	12	92	116	30	51.5	14	M26XP1.5	126	M12XP1.75	1/2	16	12

I-D(mm)	W	T	TL	M	CA	CB
40	26	51	140.5	5.5	6	8
50	28	58	153.5	5.5	7.5	10
63	29	58	161	5.5	8	10
80	37	71	192	5.5	10	12
100	40	72	203	5.5	10	12

푸트형(LB) Foot Type ■ Oilless Type ISM -LB, Low Hydraulic Type ISM L-LB

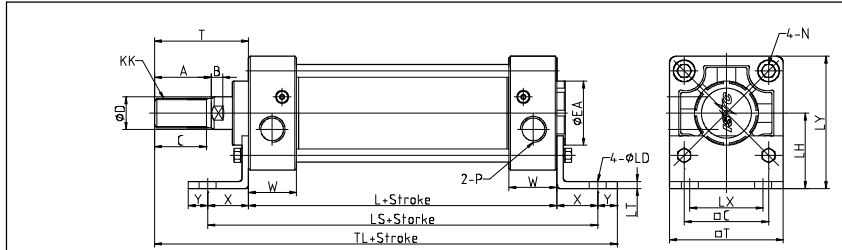

단위: mm


I-D(mm)	Stroke Range	C	A	B	ØC	ØT	ØD	ØEA	H	KK	L	N	P(PT)	T	TL
40	~500	27	30	8	44	61	16	31.5	10	M14XP1.5	84	M8XP1.25	1/4	51	175
50	~600	32	35	10	52	70	20	39.5	10	M18XP1.5	90	M8XP1.25	3/8	58	188
63	~600	32	35	10	64	83	20	39.5	10	M18XP1.5	98	M8XP1.25	3/8	58	205.5
80	~800	37	40	12	78	102	25	51.5	14	M22XP1.5	116	M12XP1.75	1/2	71	246.5
100	~800	37	40	12	92	116	30	51.5	14	M26XP1.5	126	M12XP1.75	1/2	72	257.5

I-D(mm)	W	ØD	LH	LS	LT	LX	LY	X	Y
40	26	9.0	40	138	3	42	70	27	13
50	27.5	9.0	45	144	3	50	80	27	13
63	29.5	11.5	50	165.5	3	59	93	34	16
80	36	13.5	65	203.5	5	76	116	44	16
100	39	13.5	75	211.5	5	92	133	43	17

중형실린더 ISM 시리즈 MID CYLINDER ISM SERIES

일반형(FA, FB) General Type(FA, FB)

로드 플랜지형(FA) Rod-side Flange Type(FA) ■ Oilless Type ISM -FA, Low Hydraulic Type ISM L-FA

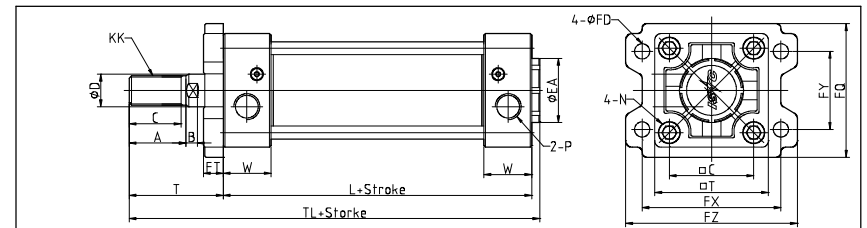


단위: mm

I-D(mm)	Stroke Range	C	A	B	ØC	ØT	ØD	ØEA	KK	L	N	P(PT)	T	TL
40	~800	27	30	8	44	61	16	31.5	M14XP1.5	84	M8XP1.25	1/4	51	140.5
50	~1000	32	35	10	52	70	20	39.5	M18XP1.5	90	M8XP1.25	3/8	58	153.5
63	~1000	32	35	10	64	83	20	39.5	M18XP1.5	98	M8XP1.25	3/8	58	161
80	~1000	37	40	12	78	102	25	51.5	M22XP1.5	116	M12XP1.75	1/2	71	192
100	~1000	37	40	12	92	116	30	51.5	M26XP1.5	126	M12XP1.75	1/2	72	203

I-D(mm)	W	ØD	FQ	FT	FX	FY	FZ
40	26	9	71	12	80	42	100
50	27.5	9	81	12	90	50	110
63	29.5	11.5	101	15	105	59	130
80	36	13.5	119	18	130	76	160
100	39	13.5	133	18	150	92	180

헤드 플랜지형(FB) Head-side Flange Type(FB) ■ Oilless Type ISM -FB, Low Hydraulic Type ISM L-FB

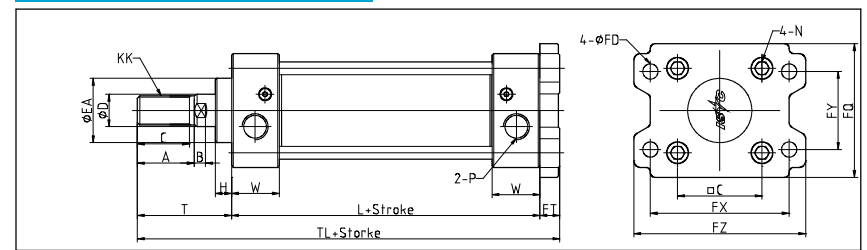

단위: mm

I-D(mm)	Stroke Range	C	A	B	ØC	ØT	ØD	ØEA	KK	L	N	P(PT)	T	TL
40	~500	27	30	8	44	61	16	31.5	M14XP1.5	84	M8XP1.25	1/4	51	147
50	~600	32	35	10	52	70	20	39.5	M18XP1.5	90	M8XP1.25	3/8	58	160
63	~600	32	35	10	64	83	20	39.5	M18XP1.5	98	M8XP1.25	3/8	58	170.5
80	~800	37	40	12	78	102	25	51.5	M22XP1.5	116	M12XP1.75	1/2	71	204.5
100	~800	37	40	12	92	116	30	51.5	M26XP1.5	126	M12XP1.75	1/2	72	215.5

I-D(mm)	W	ØD	FQ	FT	FV	FX	FY	FZ
40	26	9	71	12	80	80	42	100
50	27.5	9	81	12	70	90	50	110
63	29.5	11.5	101	15	86	105	59	130
80	36	13.5	119	18	102	130	76	160
100	39	13.5	133	18	116	150	92	180